



## Submittal Data

### 1" Hose Barb X Flo-Link with Check Valve



Project Name:

Contractor:

Engineer:

Order Number:


Additional Information:

## Specifications and Dimensions

Fittings: C36000 Brass with stainless steel retaining rings  
Seals: Nitrile butadiene rubber (NBR)  
Check insert: Acetal  
Spring: Stainless steel

Temperature: Service: 150° F  
Max: 200° F  
Pressure: Service: 150 psig  
Max: 230 psi

## Check Valve Insert Headloss Curve

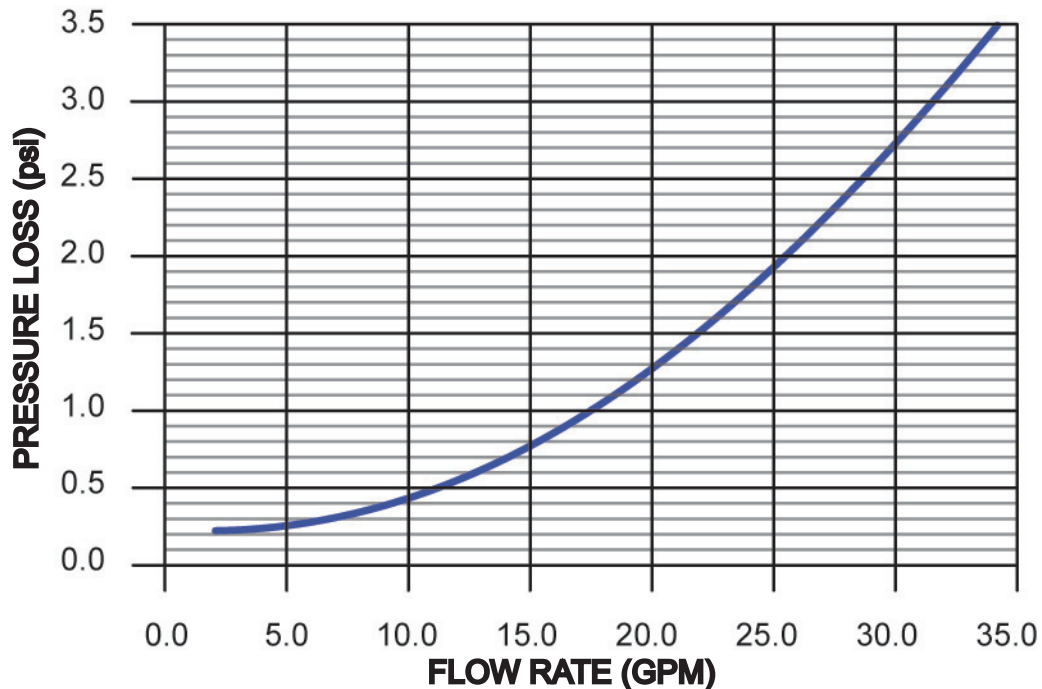

Headloss curve is the manufacturer's published graph for a single insert using clear water.



GEO-FLO PRODUCTS CORPORATION  
905 Williams Park Drive  
Bedford, IN 47421  
Phone: 812-275-8513 Fax: 812-275-8523  
www.geo-flo.com